REV.	ECN. NO.	DR.	DATE
A	NEW	LuoWei	050830
B	ECN0606013	LuoWei	060622

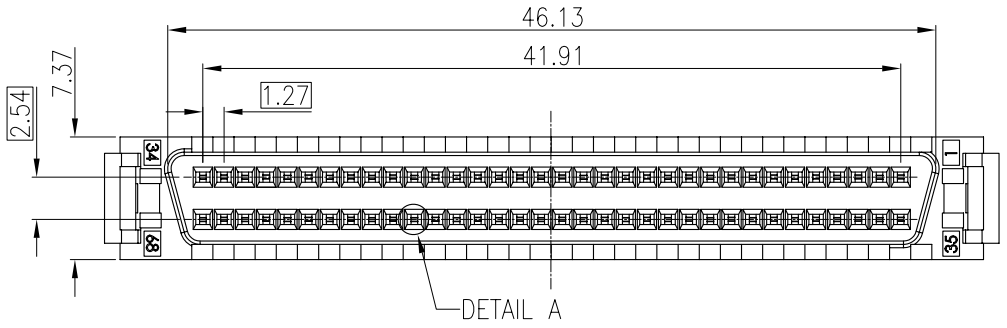

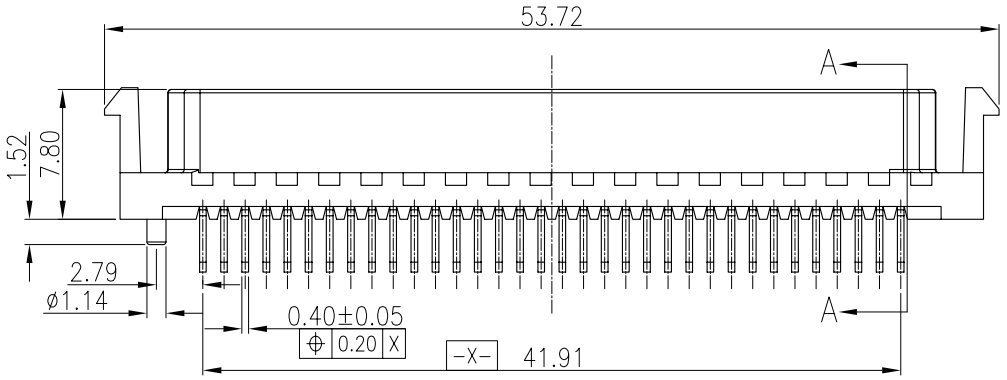

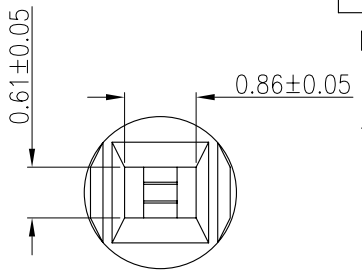

DETAIL A
SCALE 5:1

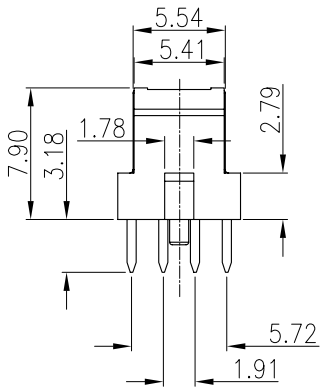

NOTES:
1.MATERIAL
HOUSING: HIGH TEMPERATURE THERMOPLASTIC.UL94V-0.
CONTACT: COPPER ALLOY.
2.PLATING
CONTACT AREA: 30U" GOLD PLATED OVER Ni.
SOLDER TAIL: 100U" TIN MIN PLATED OVER Ni.
3.ELECTRICAL:
CURRENT RATING: 1.0A.
VOLTAGE RATING: 30V.
CONTACT RESISTANCE: 25 MILLIOHMS MAX.
INSULATION RESISTANCE: 1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
4.ENVIRONMENTAL
OPERATING TEMPERATURE: -55°~+105°.

I0-XX F234108S1 X X

02-NY6T
09-LCP
07-NY46

T-TIN
G-GOLD
B-BLACK
W-WHITE
Y-YELLOW

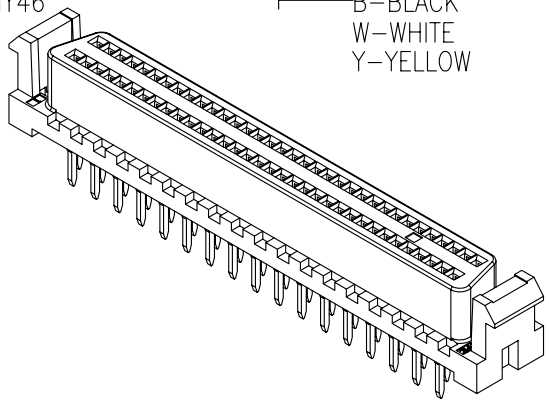

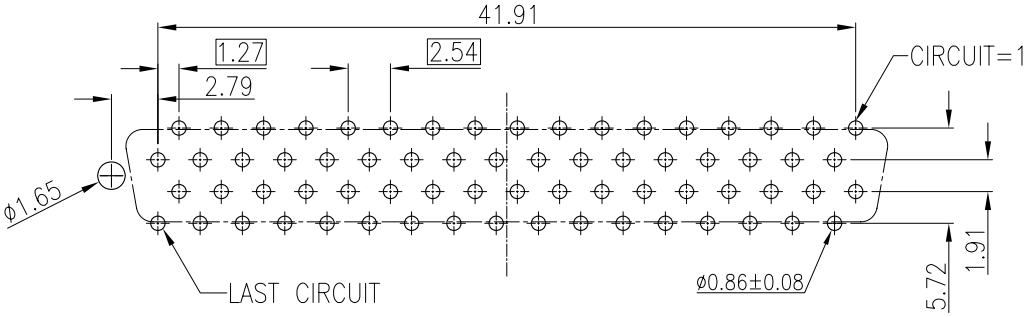

RECOMMENDED P.C.B LAYOUT

Title: SCSI 68P PITCH=1.27mm DUAL ROW STRAIGHT ANGLE FEMALE WITH POST DIP TYPE			Zhongxiang Electron Science CO.,LTD 中祥电子科技有限公司		
tolerances linear: .x ±0.30, .xx ±0.20, .xxx ±0.10 angles: x.° ±5°, .x° ±2°, .xx° ±1°	app.		units: ☒ mm ☐ inch	part no: I0-XXF234108S1XX	
projection	chk.		size: A4	dwg no. 0508028	
revision. B	dr.	B	scale: 1:1	sheet: 1/1	
	date.	060622			