

Specifications:

Current Rating:3.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m ohm. max.
 Insulation Resistance:1,000M ohm. min.
 Withstanding Voltage:1,000V AC For One Minute
 Operating Temperature Range:-40°C ~ +85°C

Material and Finish

Insulator:High Temp. Plastic (Nylon 66 UL94V-0)
 Insulator Color:Beige
 Contact:Brass
 Plating:Tin plated


How To Order

2317RM-XX

No. Of Contacts
 Right Angle Type

Dimension:

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
2	2.50	7.50	8	17.50	22.50	14	32.50	37.50
3	5.00	10.00	9	20.00	25.00	15	35.00	40.00
4	7.50	12.50	10	22.50	27.50	16	37.50	42.50
5	10.00	15.00	11	25.00	30.00			
6	12.50	17.50	12	27.50	32.50			
7	15.00	20.00	13	30.00	35.00			

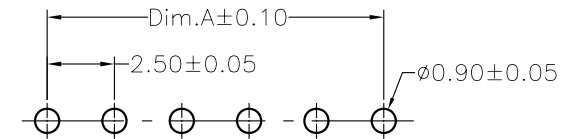

PCB LAYOUT

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 2.5mm Wire To Board Wafer R/A Type	SIZE A4
E				Sea	.X=±0.20 .XX=±0.15			
D				CHECKED:	UNIT: MM	PART NO: 2317RM-XX		
C				Jeremy Liu	SCALE: 1:1			
B				APPROVAL:	SHEET: 1 / 1			
A	13-Jun-2005	(PC0001)	Sea	Mike Wu	PROJECTION:			
REV	DATE	FILE	BY					