


Specifications:

Current Rating:3.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m ohm. max.
 Insulation Resistance:1,000M ohm. min.
 Withstanding Voltage:1,000V AC For One Minute
 Operating Temperature Range:-40°C ~ +85°C
 Material and Finish
 Insulator:Nylon 66 UL94V-0
 Insulator Color:Beige
 Contact:Brass
 Plating:Tin plated
 How To Order
 2317SM-XX

└── No. Of Contacts
 └── Straight Type

Dimension:

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
2	2.50	7.50	9	20.00	25.00
3	5.00	10.00	10	22.50	27.50
4	7.50	12.50	11	25.00	30.00
5	10.00	15.00	12	27.50	32.50
6	12.50	17.50	13	30.00	35.00
7	15.00	20.00	14	32.50	37.50
8	17.50	22.50	15	35.00	40.00

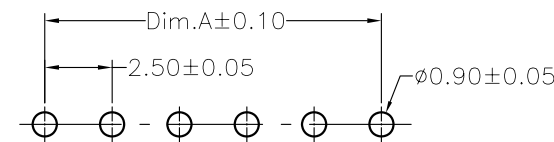

PCB LAYOUT

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 中祥工业股份有限公司 Maltron Industrial Co., Ltd.	DESCRIPTION: 2.5mm Wire To Board Wafer Straight Type	SIZE A4
E			Leo	.X=±0.20 .XX=±0.15				
D			CHECKED:	UNIT: MM				
C			Jeremy Liu	SCALE: 1:1				
B			APPROVAL:	SHEET: 1 / 1	PART NO:	2317SM-XX		
A	06-Aug-2008	(PC0001)	Leo	Mike Wu	PROJECTION:			
REV	DATE	FILE	BY					