





1

2

3

4

5

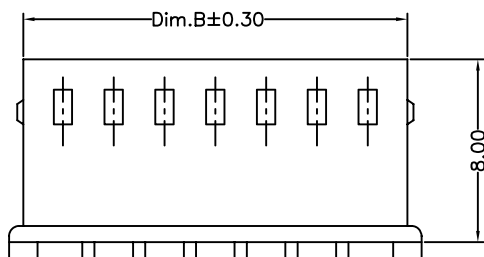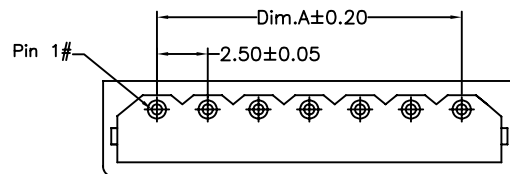

Specifications:

Current Rating: 3.0A AC/DC

Voltage Rating: 250V AC/DC

Contact Resistance: 20m ohm. max.

Insulation Resistance: 1000M ohm. Min.

Withstanding Voltage: 1000V AC For One Minute

Operating Temperature Range: -40°C to + 85°C

Application Wire:AWG #22-#28

Material and Finish

Insulator:High Temp. Plastic(Nylon 66 UL94V-0)

Insulator Color:Beige

Contact:Phosphor Bronze

Plating:Tin Plated

How To Order:

2318HM-XX

No. Of Position

H:Housing

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
2	2.50	5.80	9	20.00	23.30
3	5.00	8.30	10	22.50	25.80
4	7.50	10.80	11	25.00	28.30
5	10.00	13.30	12	27.50	30.80
6	12.50	15.80	13	30.00	33.30
7	15.00	18.30	14	32.50	35.80
8	17.50	20.80	15	35.00	38.30

RoHS Compliant

REV	DATE	FILE	BY	DRAWN:	GENERAL TOLERANCE:	DESCRIPTION:	SIZE
E				Vincent	.X=±0.2 .XX=±0.15	2.5mm Wire to Board Housing	A4
D				CHECKED:	UNIT: MM		
C				Jeremy Liu	SCALE:	PART NO: 2318HM-XX	A4
B				APPROVAL:	SHEET: 1 / 1		
A	05-Dec-2007	(PC0006)	Vincent	Mike Wu	PROJECTION:		

Zhongxiang Electron Science CO.,LTD

繼德工業股份有限公司
Neuron Industrial Co., Ltd.