
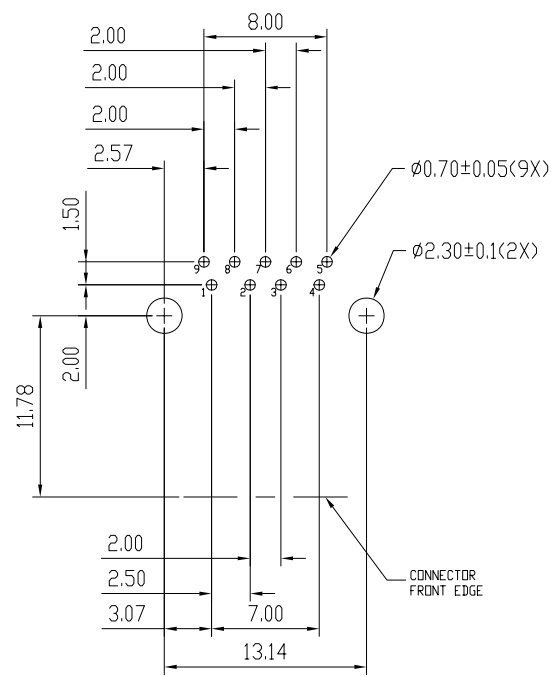


PART NO. 073-009-0

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE SEE ECN NO.200905001	5/13/09'	JOHN
B	INITIAL RELEASE SEE ECN NO.200906002	6/29/09'	JOHN

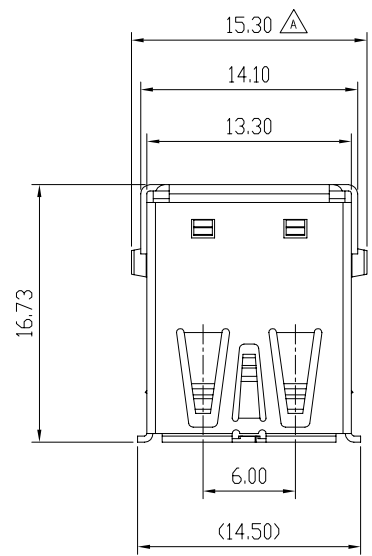

PCB TOLERANCE: ± 0.05 , THICKNESS: 1.2 mm
RECOMMENDED PCB LAYOUT(TOP VIEW)

- NOTE:
- MATERIAL
 - .HOUSING : GLASS FILLED HEAT-RESISTED RESIN,UL94V-0.
 - .SPACER : GLASS FILLED HEAT-RESISTED RESIN,UL94V-0.
 - .TERMINAL : COPPER ALLOY.
 - .SHIELD : COPPER ALLOY
 - .REAR SHIELD : COPPER ALLOY
 - PLATING
 - TERMINAL : <CONTACT AREA> GOLD.
 - <SOLDER TAIL AREA> TIN.
 - <UNDER-PLATING> NICKEL.
 - SHELL PLATING: NICKEL
 - REAR SHELL PLATING: NICKEL
 - MECHANICAL CHARACTERISTICS:
 - .INSERTION FORCE:35N(MAX)
 - .EXTRACTION FORCE:8N(MIN) AFTER DURABILITY CYCLES
 - .DURABILITY CYCLE:1500 CYCLES;
 - ELECTRICAL CHARACTERISTICS:
 - .CURRENT RATING: 1.5A;
 - .VOLTAGE RATING: 30VAC (R.M.S.);
 - .CONTACT RESISTANCE:30m OHMS MAX;
 - .INSULATION RESISTANCE.
 - a:UNMATED:100M OHMS MIN.
 - b:MATED:100M OHMS MIN .
 - .DIELECTRIC WITHSTANDING VOLLAGE:100V AC/1MINUTE
 - .OPERATING TEMPERATURE:-55°C ~ +85°C
 - .STORAGE TEMPERATURE:-40°C ~ +60°C.
 - .OPERATION /STORAGE HUMIDITY:95% OR LESS.
 - ORDER INFORMATION:

073-009-X

TERMINAL PLATING (CONTACT AREA)
 SEE TABLE 1

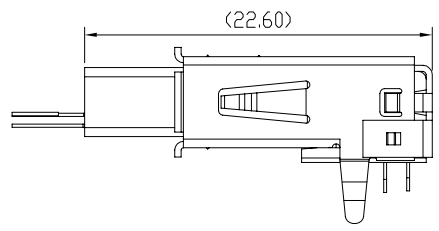
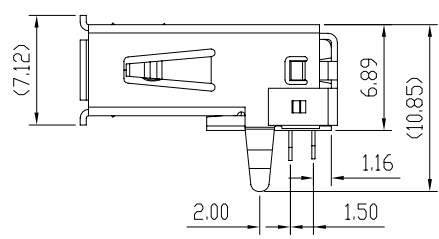
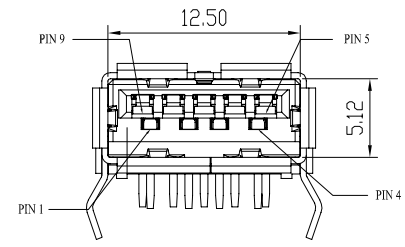


TABLE 1

2.0 4 PINS' PLATING	3.0 5 PINS' PLATING	X
GOLD FLASH	15 μ ' Au	0
	30 μ ' Au	1

SIZE: A4	DRAWING NO. 073-009-0	REV. B	SCALE: 2 : 1	SHEET: 1 OF 1	UNIT: mm	FILE PATH#
----------	-----------------------	--------	--------------	---------------	----------	------------

DRAWN	VINCENT 06/29/09'	TITLE.	USB 3.0 RECEPTACLE
CHECKED	JOHN 06/29/09'	DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: DECIMALS - XX .025 XXX .013 ANGLE - XX .25°	
APPROVALS	JOHN 06/29/09'		

豪國興業股份有限公司

PRODUCT CUSTOMER COPY