
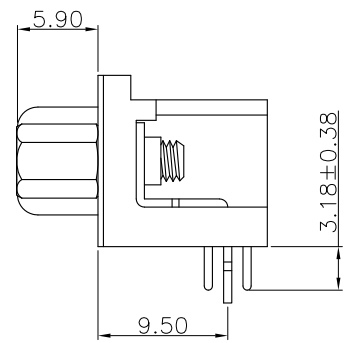




REV.	DESCRIPTION	DATE	DWN	APVD
1	PRELIMINARY	31AUG09	JC	BC

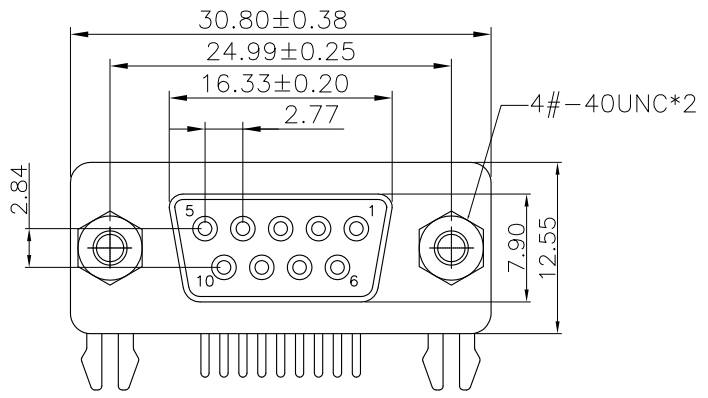

NOTE:
 MATERIAL:
 INSULATOR:PBT+30% GLASS FIBER(UL 94V-0)BLACK.
 CONTACT MATERIAL:BRASS OR PHOSPHOR BRONZE .
 CONTACT FINISH:GOLD OVER NICKEL.
 SHELL FINISH:STEEL NICKEL PLATED.
 SPECIFICATION:
 CURRENT RATING: 5 AMP
 DIELECTRIC WITHSTANDING VOLTAGE:1000V PER MINUTE.
 INSULATION RESISTANCE: 1000MW MIN. AT 500V DC.
 CONTACT RESISTANCE: 15mW MAX. 10 SEC.
 OPERATING TEMPERATURE:-55°C~+105°C.
 ○MARK IS MAJOR TEST DIMENSION.
 PART NO.

SERIES NO: 10 4-09 2 2 4 X XX 01
 PRODUCT KIND:
 PIN NUMBER:
 FEMALE:
 NUT TYPE:
 1=NO LOCK NUT
 2=LOCK NUT,
 3=ADD NUT

SERIAL NUMBER
 COLOR CODE:
 01=WHITE
 02=BLACK
 05=BLUE
 PLATING CODE:
 A=1u' B=3u'
 DIP HEIGHT:
 4=8.08mm

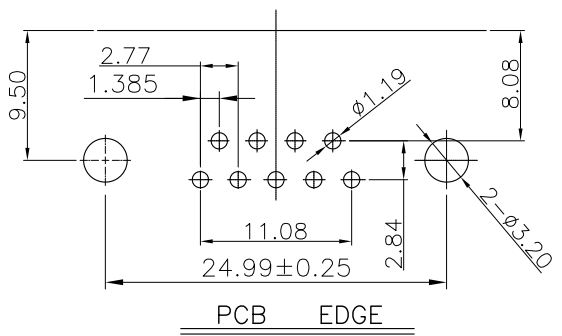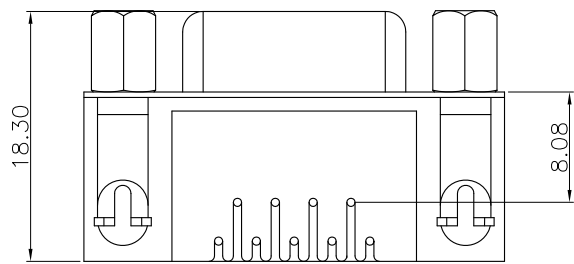

TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.15 3 PLC ± 0.1 4 PLC ± - ANGLES ± 3'	DWN 31AUG2009 JOHN_CHANG CHK 31AUG2009 MARKS_CHEN APVD 31AUG2009 BEST_CHANG PRODUCT SPEC	HAOGUO XING YE SHARE CO.,LTD.	
MATERIAL SEE NOTE	APPLICATION SPEC	DR DIP 90° 9P/F 成品 (8.08鎖螺絲)	
FINISH SEE NOTE	WEIGHT - GRAMS	SIZE A3	DRAWING NO -
PROJECTION	DIMENSIONS: MM	CUSTOMER DRAWING	RESTRICTED TO -
		SCALE -	SHEET 1 OF 1 REV 1