
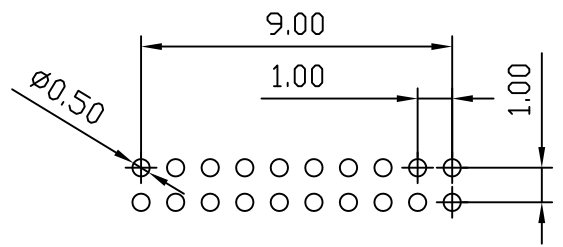
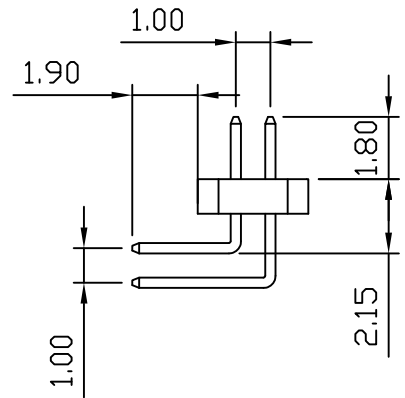
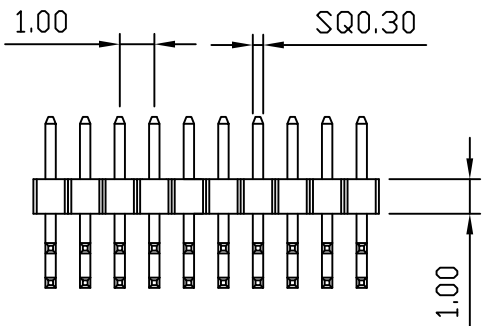


REV.	DESCRIPTION	DATE	DWN	APVD
A	RELEASED	24Aug09	MO	JK

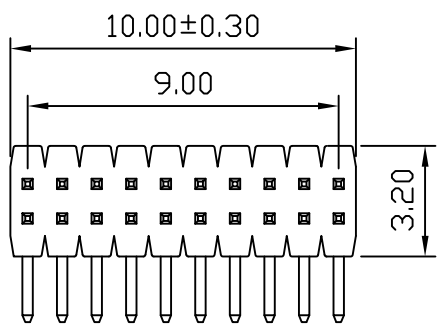

PCB LAYOUT

NOTE:

- MATERIAL:
HOUSING: PA6T, UL 94V-0; COLOR: BLACK .
POSTS: COPPER ALLOY (C2700) .
- FINISH:
POSTS: 2μ" MIN. GOLD FLASH OVER 50μ" MIN. NICKEL PLATED .
- ELECTRICAL:
INITIAL CONTACT RESISTANCE: 20 mΩ Max
AFTER TEST CONTACT RESISTANCE: 40 mΩ Max .
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC .
CURRENT RATING: 0.75 Amp .
- ENVIRONMENTAL:
OPERATING TEMPERATURE: -40°C TO +125°C .

08-0053-01
PART NUMBER

TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°	DWN	MOUNZ_PENG	24Aug2009	Zhongxiang Electron Science CO.,LTD PIN HEADER,DOUBLE ROW, VERTICAL, DIP,TYP.
	CHK	GAVIN_CHEN	24Aug2009	
	APVD	JACKY YANG	24Aug2009	
	PRODUCT SPEC	JS-GC03142-A1		
MATERIAL	SEE NOTE	APPLICATION SPEC	PIN_01-1(A)	
FINISH	SEE NOTE	WEIGHT	A3	J-08-0053
PROJECTION	DIMENSIONS: MM		CUSTOMER DRAWING	SCALE - SHEET 1 of 1 REV A