

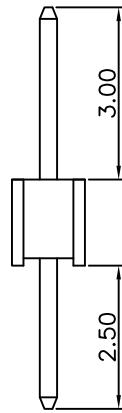
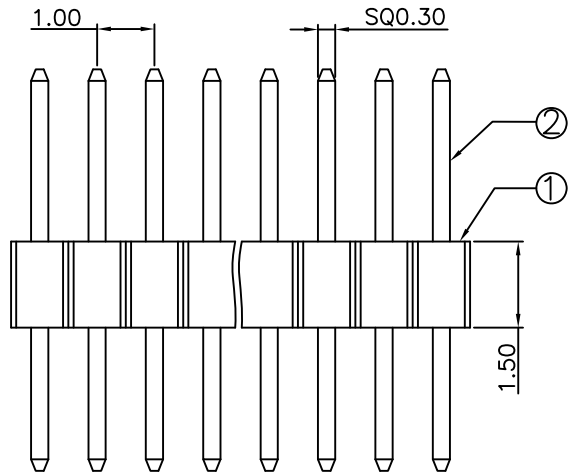


REV.	DESCRIPTION	DATE
A0	New Drawing	2008/06/07

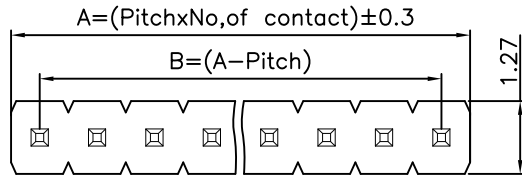


LTR	Part Name	Material	Description	QTY
1	Housing	NY-6T UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass C2700	Current Rating : 0.75A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX

Normal Force : 300 Grams Average .  
 Temperature Rating : -40°C ~ +125°C .  
 Dielectric Withstanding Voltage : 500V AC/Min



**P.C.B LAYOUT**

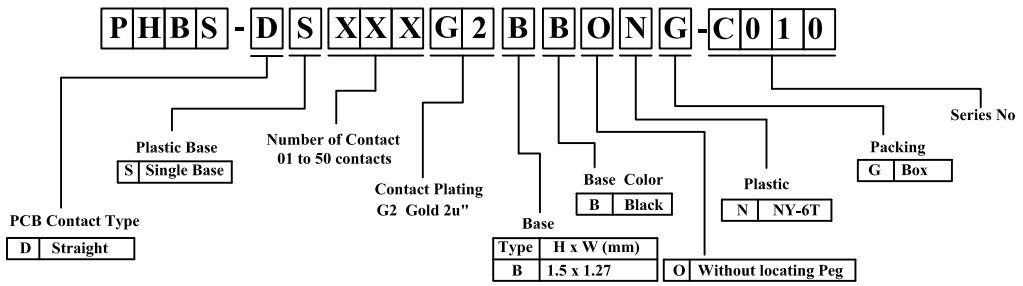

L=7.0mm

RoHS compliant

豪國興業股份有限公司

General Tolerance		TITLE		1.0 Pin Header Single Row, Double Plastic DIP Type Base	
X. ± 0.5		DRAWN		DATE	NO.
.X ± 0.3		ZhaoXiaoLin		06-07-08'	002
.XX ± 0.2		CHECK		DATE	PART NO.
.XXX ± 0.1		XiaoPing		06-07-08'	PHBS-DSXXXG2BBONG-C010
角度	± 5°	APPROVED		DATE	CUSTOMER NO.
		Jhen-fa		06-07-08'	

REV.	UNIT	SCALE	
A0	mm	7.5:1	