
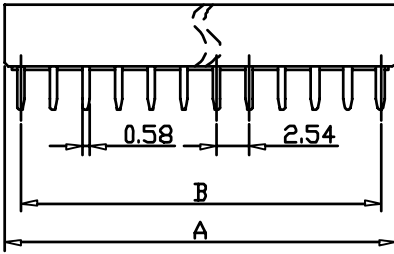


LTR.	REV.	RECORD	DATE
A			
B			
C			

MATERIAL :
 INSULATOR : PBT + THERMOPLASTIC,30% Glass FILLED,UL 94V-0 RATED
 CONTACT MATERIAL : PHOSPHOR BRONZE

ELECTRICAL CHARACTERISTICS:
 CONTACT CURRENT RATING: 1AMPS
 DIELECTRIC WITHSTANDING VOLTAGE: 750V AC MIN.
 CONTACT RESISTANCE : 30 MILLIOHMS MAX.
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN.
 TEMPERATURE RATING : -55°C~+105°C

PART NO	PINS NO. OF	A	B	C	D
IC0664	64	81.28	78.74	25.93	22.86
IC0648	48	60.96	58.42	17.6	15.24
IC0642	42	53.34	50.8		
IC0640	40	50.8	48.26		
IC0632	32	40.64	38.1		
IC0628	28	35.56	33.02	12.7	10.16
IC0624	24	30.48	27.94		
IC0624	24	30.48	27.94		
IC0620	22	27.94	25.4		
IC0332	32	40.64	38.1	9.96	7.62
IC0328	28	35.56	33.02		
IC0324	24	30.48	27.94		
IC0322	22	27.94	25.4		
IC0320	20	25.4	22.86	17.78	15.24
IC0318	18	22.86	20.32		
IC0316	16	20.32	17.78		
IC0314	14	17.78	15.24		
IC0308	8	10.16	7.62	7.62	5.08
IC0306	6	7.62	5.08		



豪國興業股份有限公司			DESCRIPTION	IC SOCKET SERIES			
			DWG.NO.	IC06-XX			
AUTHORITY	SIGNATURE	DATE		TOLERANCE UNLESS OTHERWISE SPECIFIED			
DWN.	JAY	2002.11.20		LINEAR	.x±0.3 .xx±0.2 .xxx±0.1		
CHK.	ALEX	2002.11.20		UNIT: mm	ANGLES ±3°		
APVD.	JACKY	2002.11.20					
DWG KIND:	CUSTOMER	REV.	A 0	SCALE	1:1	SHEET	1 OF 1