






1

2

3

4

5

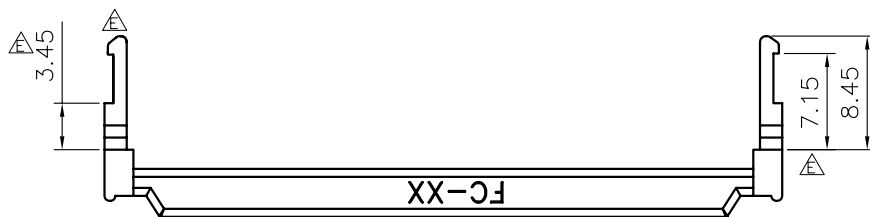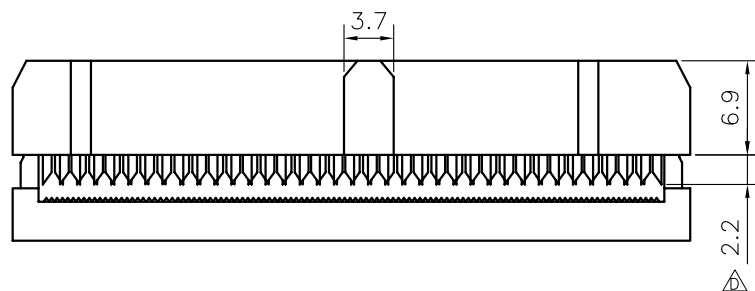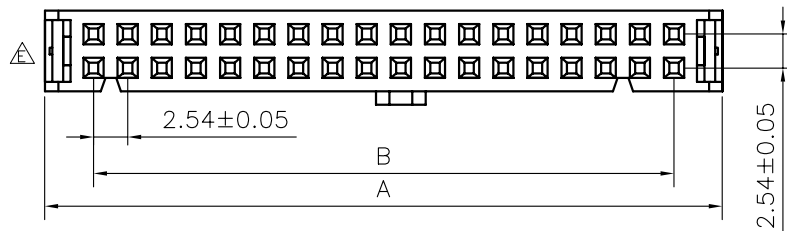

Specifications:

Current rating:1.0A AC/DC
 Voltage rating:30V AC/DC
 Contact resistance:20m ohm max.
 Withstanding Voltage:500V AC/minute
 Insulation resistance:1000M ohm min.
 Temperature Rating:-40°C ~ +105°C

Materials:

Insulator:PBT (UL94V-0)
 Contact:Copper Alloy
 Finish:Selective Gold Plated

How To Order

4401-XXSR-XX

Blank:Black(Standard Color)
 GR;Gray;BU:Blue
 SR:With Strain Relief
 No. of Contacts

Dimension Information:

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
6	12.30	5.08	30	42.78	35.56
8	14.84	7.62	34	47.86	40.64
10	17.38	10.16	36	50.40	43.18
12	19.92	12.70	40	55.48	48.26
14	22.46	15.24	44	60.56	53.34
16	25.00	17.78	50	68.18	60.96
18	27.54	20.32	56	75.80	68.58
20	30.08	22.86	60	80.88	73.66
24	35.16	27.94	64	85.96	78.74
26	37.70	30.48			

RoHS Compliant

REV	DATE	FILE	BY
E	04-Dec-2008	ECN-CN081211	zhangxh
D	11-Sep-2008	ECN-CN080916	Leo
A	10-MAR-2008	(PC0001)	Leo

DRAWN: Leo
CHECKED: Jeremy Liu
APPROVAL: MIKE WU

GENERAL TOLERANCE: .X=±0.2 .XX=±0.15
UNIT: mm
SCALE: 1:1
SHEET: 1 / 1
PROJECTION:

豪國興業股份有限公司

DESCRIPTION:
2.54MM Flat Cable IDC Socket With Strain Relief

PART NO:
4401-XXSR-XX

SIZE
A4