
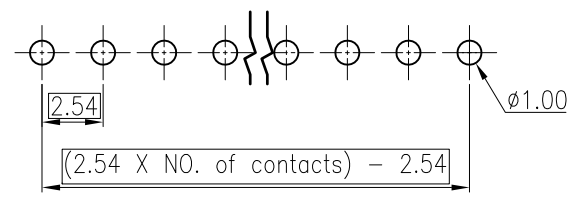
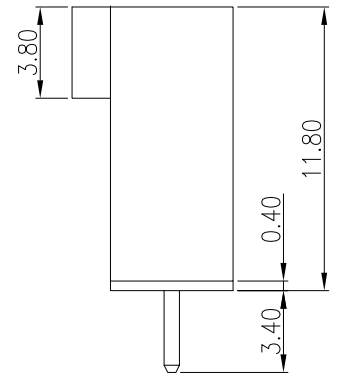
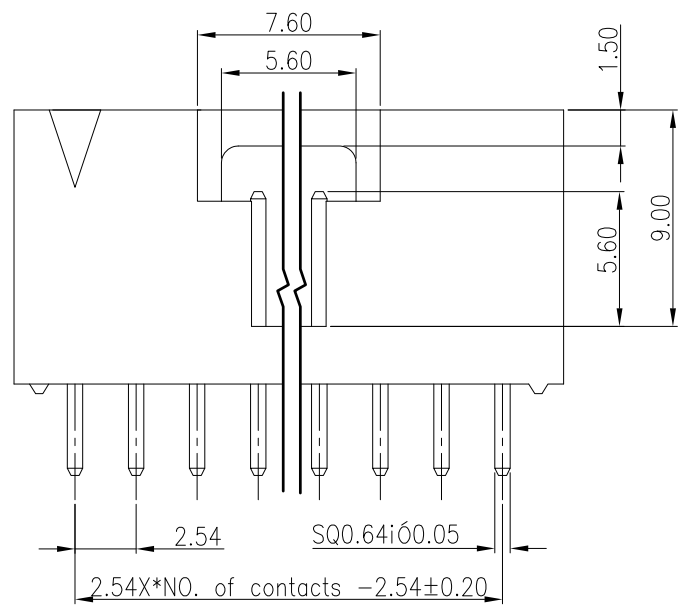


| REV. | DESCRIPTION | DATE | DWN | APVD |
|------|-------------|---------|-----|------|
| A | RELEASED | 27MAY09 | MD | DZ |
| A1 | | 21Oct09 | MD | JY |

NOTES:
 1.MATERIAL:
 HOUSING: (SEE TABLE), UL94 V-0, COLOR: (SEE TABLE).
 CONTACTS: BRASS.
 2.CONTACTS: GOLD FLASH OVER 1.27μm [50μ"] MIN. NICKEL PLATED.

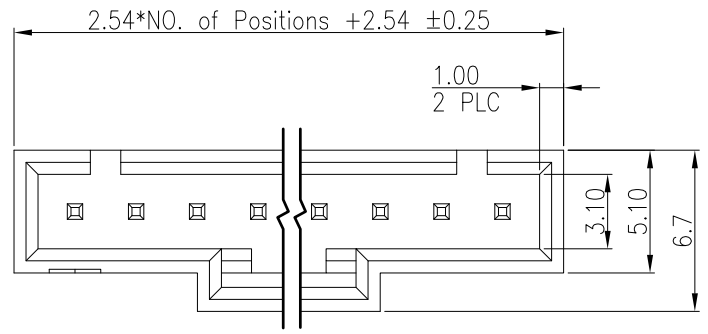


RECOMMENDED PCB LAYOUT
 TOLERANCE: ±0.05


| | | | | |
|--------|---------------|------------------|-------|--------------|
| 1.775 | BLACK | PBT | 1*10 | J05-0001-08 |
| 0.8625 | | NY6T | 1*5 | 05-0001-09 |
| 0.767 | NATURAL | NY66+30%GF | 1*4 | 05-0001-07 |
| | | NY9T | | 05-0001-06 |
| | BLACK | NY6T | | 05-0001-05 |
| 0.681 | BLACK | PBT | | 1*3 |
| | | NY6T | | 05-0001-03 |
| | | PBT | | 05-0001-02 |
| | | NY6T | | 05-0001-01 |
| WEIGHT | HOUSING COLOR | HOUSING MATERIAL | POLES | NEW PRAT NO. |

| | | | | |
|--|--|-----------------------------|--|-----------------------------|
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | DWN Michael_Dong 21Oct2009 | Zhongxiang Electron Science CO.,LTD | |
| 0 PLC ± - | | CHK Gavin_Chen 21Oct2009 | | |
| 1 PLC ± 0.3 | | APVD Jacky_Yang 21Oct2009 | NAME | |
| 2 PLC ± 0.2 | | PRODUCT SPEC JS-GC03137-A1 | CDIN CONNECTOR VERTICAL, DIP. | |
| 3 PLC ± 0.15 | | APPLICATION SPEC CDIN-01-01 | SIZE A3 | DRAWING NO C-05-0001 |
| 4 PLC ANGLES ± - ± 3° | | WEIGHT (SEE TABLE) GRAMS | | |
| MATERIAL SEE NOTE | | DIMENSIONS: MM | CUSTOMER DRAWING | SCALE - SHEET 1 of 1 REV A1 |
| FINISH SEE NOTE | | | | |
| PROJECTION | | | | |


| REV. | DESCRIPTION | DATE | DWN | APVD |
|------|-------------|---------|-----|------|
| A | RELEASED | 27MAY09 | MD | DZ |
| A1 | | 21Oct09 | MD | JY |





PRODUCT.




PE BAG LAYOUT.



INNER CARTON.

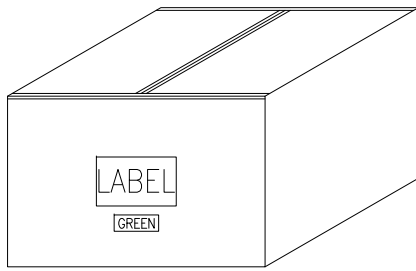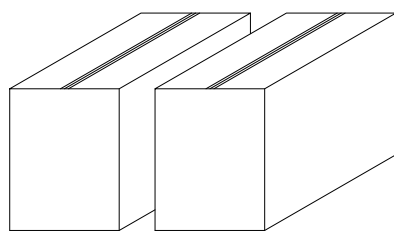

SEAL CARTON.

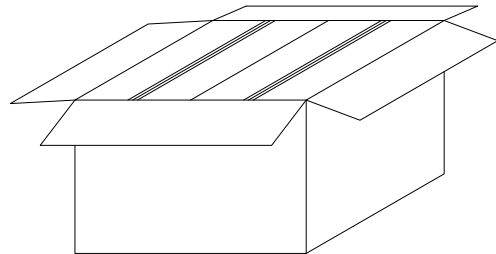

OUTSIDE CARTON.



NOTE:

- MATERIAL:
 BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL, (BURSTING STRENGTH: 19Kg/cm². EDGE CRUSH STRENGTH: 44 LB)
 BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
- EACH BAG SHALL BE INCLUDED DESICCANT.

| | | | | | | | |
|----------|----------|------------|-----------|---------|-------|------------------|--------------|
| 10.4 KG | 6.9 KG | 8000 | 4000 | 1000 | 1*5 | | 05-0001-09 |
| 10.4 KG | 7.1 KG | 4000 | 2000 | 500 | 1*10 | CA1111810IB0G0S0 | J05-0001-08 |
| 10.4 KG | 6.9 KG | 8000 | 4000 | 1000 | 1*5 | CA0211805IB0G0S0 | 05-0001-07 |
| 10.4 KG | 9.2 KG | 12000 | 6000 | 1000 | 1*4 | CA0611804IB0G0S0 | 05-0001-06 |
| | | | | | | CA0511804IB0G0S0 | 05-0001-05 |
| | | | | | | CA0211804E0G0S0 | 05-0001-04 |
| | | | | | | CA0211804IB0G0S0 | 05-0001-03 |
| | | | | | | CA0111804IB0G0S0 | 05-0001-02 |
| 12.1 KG | 10.9 KG | 16000 | 8000 | 1000 | 1*3 | CA0211803IB0G0S0 | 05-0001-01 |
| G.W/(kg) | N.W/(kg) | PCS/CARTON | PCS/INNER | PCS/BAG | POLES | OLD PRAT NO. | NEW PRAT NO. |

| | | | | | |
|--|--------|----------------------------|------------------|--|------------|
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | DWN Michael_Dong 21Oct2009 | | Zhongxiang Electron Science CO.,LTD | |
| 0 PLC | ± - | CHK Gavin_Chen 21Oct2009 | NAME | | |
| 1 PLC | ± 0.3 | APVD Jacky_Yang 21Oct2009 | PRODUCT SPEC | CDIN CONNECTOR VERTICAL DIP | |
| 2 PLC | ± 0.2 | SEE NOTE | APPLICATION SPEC | SIZE | DRAWING NO |
| 3 PLC | ± 0.15 | SEE NOTE | WEIGHT | A3 | PK-05-0001 |
| 4 PLC | ± - | PROJECTION | DIMENSIONS: | CUSTOMER DRAWING | SCALE |
| ANGLES | ± 3' | | MM | SHEET | 1 of 1 |
| | | | | REV | A1 |