

NOTE:

1. MATERIAL:




HOUSING: (SEE TABLE), UL94 V-0, COLOR: (SEE TABLE).

CONTACTS: BRASS.


2. FINISH:

CONTACTS: GOLD FLASH OVER 1.27 $\mu$ m [50 $\mu$ ] MIN. NICKEL PLATED.

$\Delta$ 0.381 $\mu$ m [15 $\mu$ ] MIN. GOLD PLATED OVER 1.27 $\mu$ m [50 $\mu$ ] MIN. NICKEL PLATED.

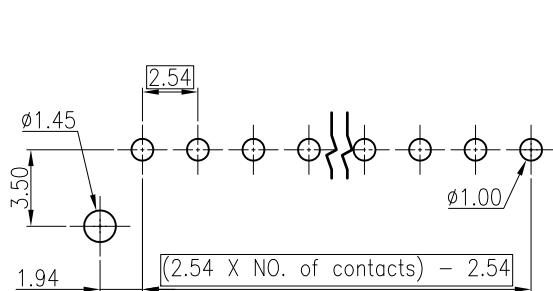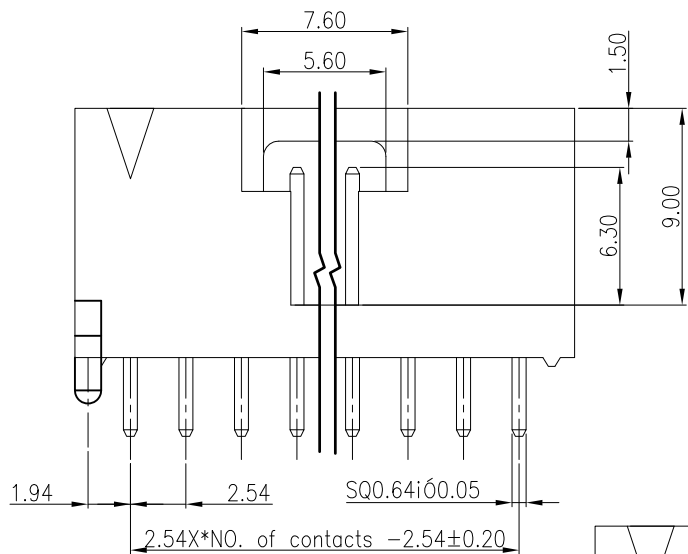

RECOMMENDED PCB LAYOUT  
TOLERANCE:  $\pm 0.05$

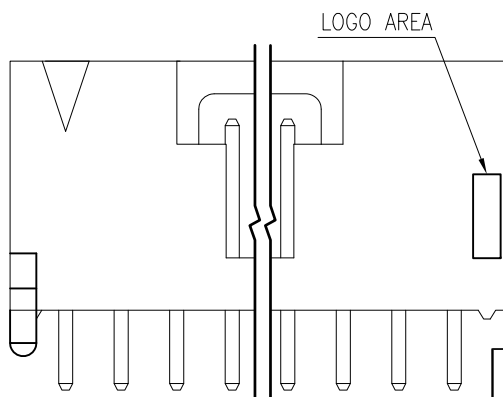

WITH TYCO LOGO TYPE

NO LOGO	GOLD FLASH	BLACK	NY66+30%G.F	0.767	1*4	05-0005-18		
TYCO LOGO	GOLD FLASH	BLACK	NY6T	0.875	1*5	05-0005-17		
				0.725	1*3	05-0005-16		
				0.767	1*4	05-0005-15		
NO LOGO	GOLD FLASH	BLACK	PBT	1.3	1*8	05-0005-14		
				NY6T	0.9875	1*6	05-0005-13	
					0.875	1*5	05-0005-12	
					0.767	1*4	05-0005-11	
				RED(205C) NATURAL	NY66+30%G.F	0.767	1*4	05-0005-10
		NY9T	0.767			1*4	05-0005-09	
			0.767			1*4	05-0005-08	
		BLACK	NY6T			0.767	1*4	05-0005-06
						0.767	1*4	05-0005-05
		RED(205C)	NY66+30%G.F	NY9T	0.725	1*3	05-0005-04	
0.725	1*3				05-0005-03			
0.725	1*3				05-0005-02			
LOGO TYPE	MIN. GOLD THICKNESS	HOUSING COLOR	HOUSING MATERIAL	WEIGHT	POLES	NEW PRAT NO.		

TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN MICHAEL DONG 08June2009	<b>Zhongxiang Electron Science CO.,LTD</b>			
0 PLC $\pm$ -	CHK GAVIN CHEN 08June2009				
1 PLC $\pm$ 0.3	APVD DAVID ZHONG 08June2009	NAME			
2 PLC $\pm$ 0.2	PRODUCT SPEC	CDIN CONNECTOR VERTICAL, DIP.			
3 PLC $\pm$ 0.15	JS-GC03137-A1	SIZE DRAWING NO RESTRICTED TO			
4 PLC $\pm$ -	SEE NOTE APPLICATION SPEC	A3	C-05-0005	-	
ANGLES $\pm$ 3'	FINISH SEE NOTE	WEIGHT (SEE TABLE) GRAMS		DIMENSIONS: MM	
MATERIAL	PROJECTION	CUSTOMER DRAWING		SCALE -	SHEET 1 of 1
SEE NOTE		REV A			

8

7

6

5

4

3


2

1


REV.	DESCRIPTION	DATE	DWN	APVD
A	RELEASED	07MAY09	MD	DZ

NOTE:


- MATERIAL:  
 BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL, (BURSTING STRENGTH: 19Kgf/cm<sup>2</sup>, EDGE CRUSH STRENGTH: 44 LB)  
 BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
- EACH BAG SHALL BE INCLUDED DESICCANT.





PRODUCT.




PE BAG LAYOUT.



INNER CARTON.

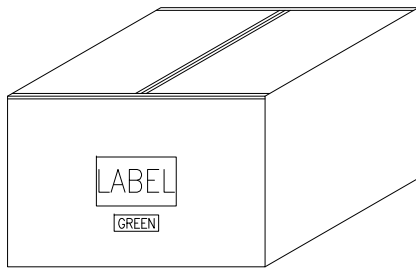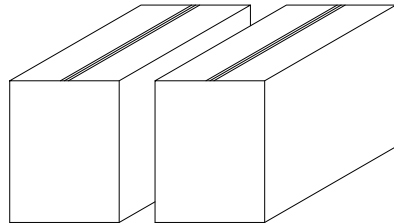

SEAL CARTON.

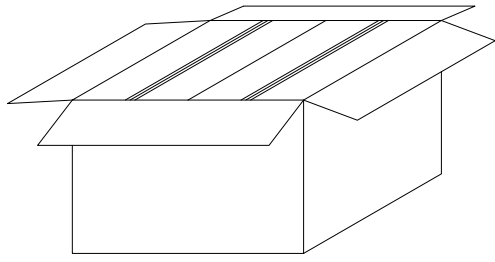

OUTSIDE CARTON.




8.2 KG	7.0 KG	8000	4000	1000	1*5	<del>CC12123051B0G0S1</del>	05-0005-17
12.8 KG	11.6 KG	16000	8000	1000	1*3	<del>CC12123031B0G0S1</del>	05-0005-16
10.4 KG	9.2 KG	12000	6000	1000	1*4	<del>CC12123041B0G0S1</del>	05-0005-15
9.0 KG	7.8 KG	6000	3000	500	1*8	<del>CC11123081B0G0S0</del>	05-0005-14
9.1 KG	7.9 KG	8000	4000	500	1*6	<del>CC12123061B0G0S0</del>	05-0005-13
8.2 KG	7.0 KG	8000	4000	1000	1*5	<del>CC12123051B0G0S0</del>	05-0005-12
10.4 KG	9.2 KG	12000	6000	1000	1*4	<del>CC12123041B0G0S1</del>	05-0005-15
						<del>CC16123041B0G0S0</del>	05-0005-11
						<del>CC15123041R0G0S0</del>	05-0005-10
						<del>CC15123041E0G0S0</del>	05-0005-09
						<del>CC15123041B0G0S0</del>	05-0005-08
						<del>CC12123041B070S2</del>	05-0005-07
12.8 KG	11.6 KG	16000	8000	1000	1*3	<del>CC12123041B0G0S0</del>	05-0005-06
						<del>CC11123041B0G0S0</del>	05-0005-05
						<del>CC16123031R0G0S0</del>	05-0005-04
						<del>CC15123031R0G0S0</del>	05-0005-03
						<del>CC15123031B0G0S0</del>	05-0005-02
						<del>CC12123031B0G0S0</del>	05-0005-01
G.W/(kg)	N.W/(kg)	PCS/CARTON	PCS/INNER	PCS/BAG	POLES	OLD PRAT NO.	NEW PRAT NO.

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN 27MAY2009		<b>Zhongxiang Electron Science CO.,LTD</b>	
0 PLC	± -	CHK	27MAY2009		
1 PLC	± 0.3	GAVIN_CHEN		CDIN CONNECTOR RIGHT ANGLE DIP	
2 PLC	± 0.2	APVD	27MAY2009		
3 PLC	± 0.15	DAVID_ZHONG		NAME	
4 PLC	± -	PRODUCT SPEC		SIZE	
ANGLES	± 3'	APPLICATION SPEC		DRAWING NO	
MATERIAL SEE NOTE		WEIGHT		A3	
FINISH SEE NOTE		DIMENSIONS: MM		CUSTOMER DRAWING	
PROJECTION		SCALE		SHEET 1 of 2	
		REV		A	


D  
C  
B  
A

8 7 6 5 4 3 2 1


REV.	DESCRIPTION	DATE	DWN	APVD
A	RELEASED	08June09	MD	DZ




PRODUCT.




PE BAG LAYOUT.




AIR BUBBLE BAG

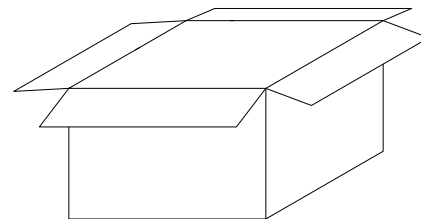


OUTSIDE CARTON.

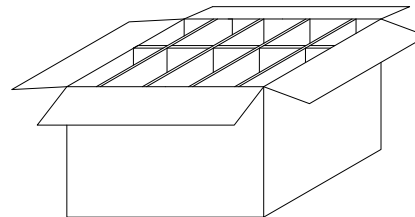

SEAL CARTON.



LABEL  
GREEN



CLAPBOARD.

NOTE:

- MATERIAL:  
BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL,  
(BURSTING STRENGTH: 19Kgf/cm<sup>2</sup>, EDGE CRUSH STRENGTH: 44 LB)  
BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
- EACH BAG SHALL BE INCLUDED DESICCANT.

4.2 KG	3.1 KG	3500	350	1*5	CC1212305IB0G0S1	05-0005-17
4.7 KG	3.6 KG	5000	500	1*3	CC1212303IB0G0S1	05-0005-16
5.3 KG	4.2 KG	5000	500	1*4	CC1212304IB0G0S1	05-0005-15
4.4 KG	3.5 KG	2500	250	1*8	CC1112308IB0G0S0	05-0005-14
4.6 KG	3.5 KG	3500	350	1*6	CC1212306IB0G0S0	05-0005-13
4.2 KG	3.1 KG	3500	350	1*5	CC1212305IB0G0S0	05-0005-12
5.3 KG	4.2 KG	5000	500	1*4	CC1612304IB0G0S0	05-0005-11
					CC1512304IR0G0S0	05-0005-10
					CC1512304IE0G0S0	05-0005-09
					CC1512304IB0G0S0	05-0005-08
					CC1212304IB070S2	05-0005-07
4.7 KG	3.6 KG	5000	500	1*3	CC1212304IB0G0S0	05-0005-06
					CC1112304IB0G0S0	05-0005-05
					CC1612303IR0G0S0	05-0005-04
4.7 KG	3.6 KG	5000	500	1*3	CC1512303IR0G0S0	05-0005-03
					CC1512303IB0G0S0	05-0005-02
					CC1212303IB0G0S0	05-0005-01
G.W/(kg)	N.W/(kg)	PCS/CARTON	PCS/BAG	POLES	OLD PRAT NO.	NEW PRAT NO.

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN MICHAEL_DONG 08June2009		<b>Zhongxiang Electron Science CO.,LTD</b>	
0 PLC	± -	CHK	08June2009		
1 PLC	± 0.3	GAVIN_CHEN		NAME	
2 PLC	± 0.2	DAVID_ZHONG			
3 PLC	± 0.15	PRODUCT SPEC		CDIN CONNECTOR RIGHT ANGLE DIP	
4 PLC	± -	APPLICATION SPEC		SIZE DRAWING NO	
ANGLES	± 3'	WEIGHT		A3 PK-05-0005	
MATERIAL SEE NOTE		DIMENSIONS: MM		RESTRICTED TO	
FINISH SEE NOTE		CUSTOMER DRAWING		SCALE	
PROJECTION		SHEET 2 of 2		REV A	