

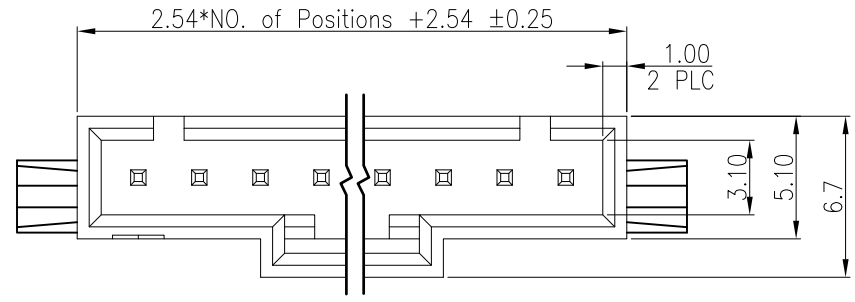
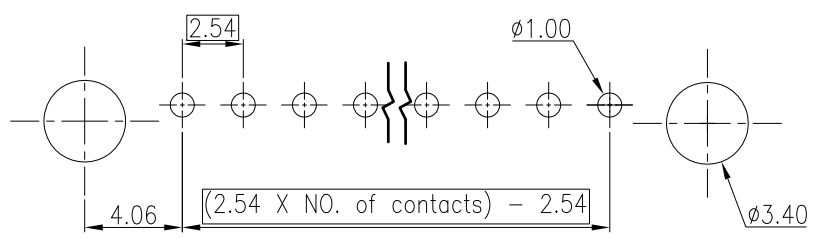


REV.	DESCRIPTION	DATE	DWN	APVD
A	RELEASED	27MAY09	MD	DZ

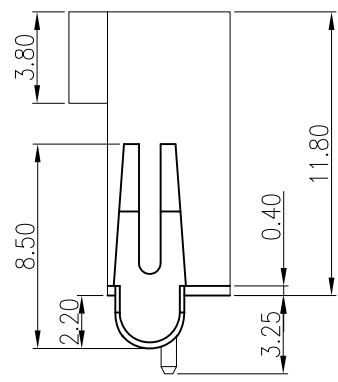

NOTES:
 1.MATERIAL:
 HOUSING: (SEE TABLE), UL94 V-0, COLOR: BLACK
 CONTACTS: BRASS.
 2.CONTACTS: GOLD FLASH OVER 1.27μm [50μ"] MIN. NICKEL PLATED.

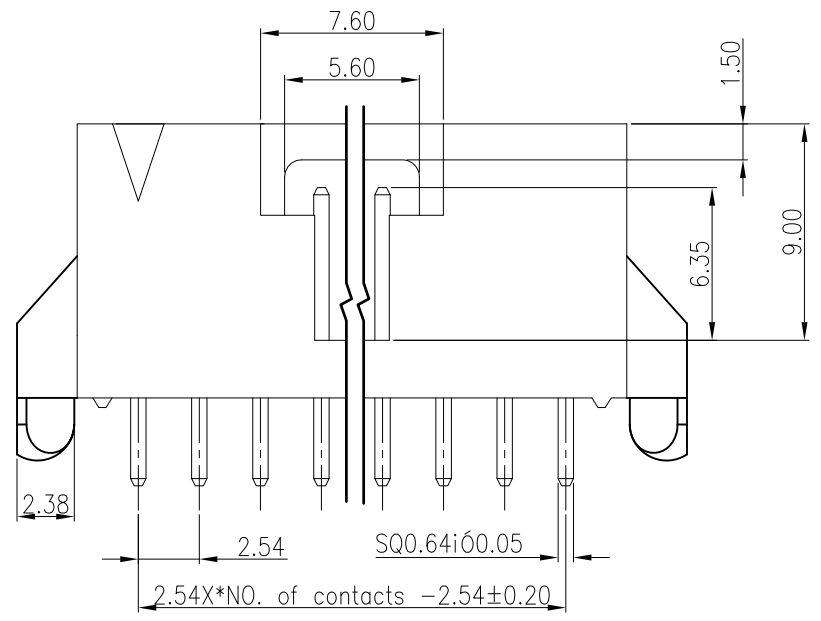


RECOMMENDED PCB LAYOUT
 TOLERANCE: ±0.05


0.9625	HF NY66	1*5	05-0003-02
	NY6T		05-0003-01
WEIGHT	HOUSING MATERIAL	POLES	NEW PRAT NO.

OTHERWISE SPECIFIED:	MICHAEL_DONG	Zhongxiang Electron Science CO.,LTD	
0 PLC ± -	CHK 27MAY2009	NAME	
1 PLC ± 0.3	GAVIN_CHEN	CDIN CONNECTOR VERTICAL, DIP.	
2 PLC ± 0.2	APVD 27MAY2009	SIZE	DRAWING NO
3 PLC ± 0.15	DAVID_ZHONG	A3	C-05-0003
4 PLC ± -	PRODUCT SPEC	WEIGHT	CUSTOMER DRAWING
ANGLES ± 3°	JS-GC03137-A1	(SEE TABLE) GRAMS	
MATERIAL	SEE NOTE	DIMENSIONS:	MM
FINISH	SEE NOTE	SCALE	-
PROJECTION	SEE NOTE	SHEET	1 of 1
		REV	A


REV.	DESCRIPTION	DATE	DWN	APVD
A	RELEASED	27MAY09	JC	BC





PRODUCT.




PE BAG LAYOUT.



INNER CARTON.

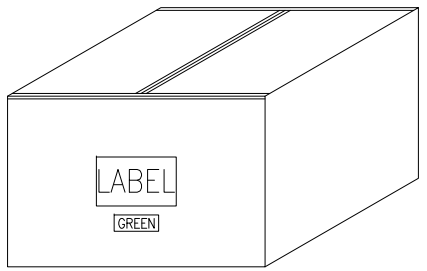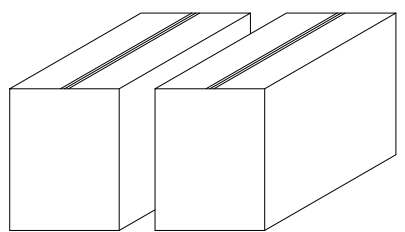

SEAL CARTON.

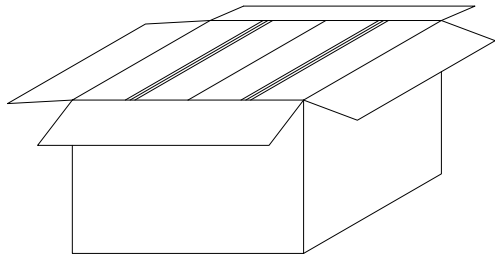

OUTSIDE CARTON.



NOTE:

- MATERIAL:
 BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL, (BURSTING STRENGTH: 19Kgf/cm², EDGE CRUSH STRENGTH: 44 LB)
 BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
- EACH BAG SHALL BE INCLUDED DESICCANT.

8.9 KG	7.7 KG	8000	4000	1000	1*5	CB0512305IB060S0	05-0003-02
						CB0212305IB060S0	05-0003-01
G.W/(kg)	N.W/(kg)	PCS/CARTON	PCS/INNER	PCS/BAG	POLES	OLD PRAT NO.	NEW PRAT NO.

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN 27MAY2009		Zhongxiang Electron Science CO.,LTD			
0 PLC	± -	MICHAEL DONG 27MAY2009					
1 PLC	± 0.3	CHK 27MAY2009		NAME			
2 PLC	± 0.2	GAVIN CHEN		CDIN CONNECTOR VERTICAL DIP			
3 PLC	± 0.15	APVD 27MAY2009					
4 PLC	± -	DAVID ZHONG		SIZE DRAWING NO			
ANGLES	± 3'	PRODUCT SPEC		A3 PK-05-0003			
MATERIAL SEE NOTE		APPLICATION SPEC		RESTRICTED TO			
FINISH SEE NOTE		WEIGHT		CUSTOMER DRAWING			
PROJECTION		DIMENSIONS: MM		SCALE -		SHEET 1 of 1	
						REV A	