


REV.	DESCRIPTION	DATE	DWN	APVD
A	RELEASED	23DEC2009	AX	JY

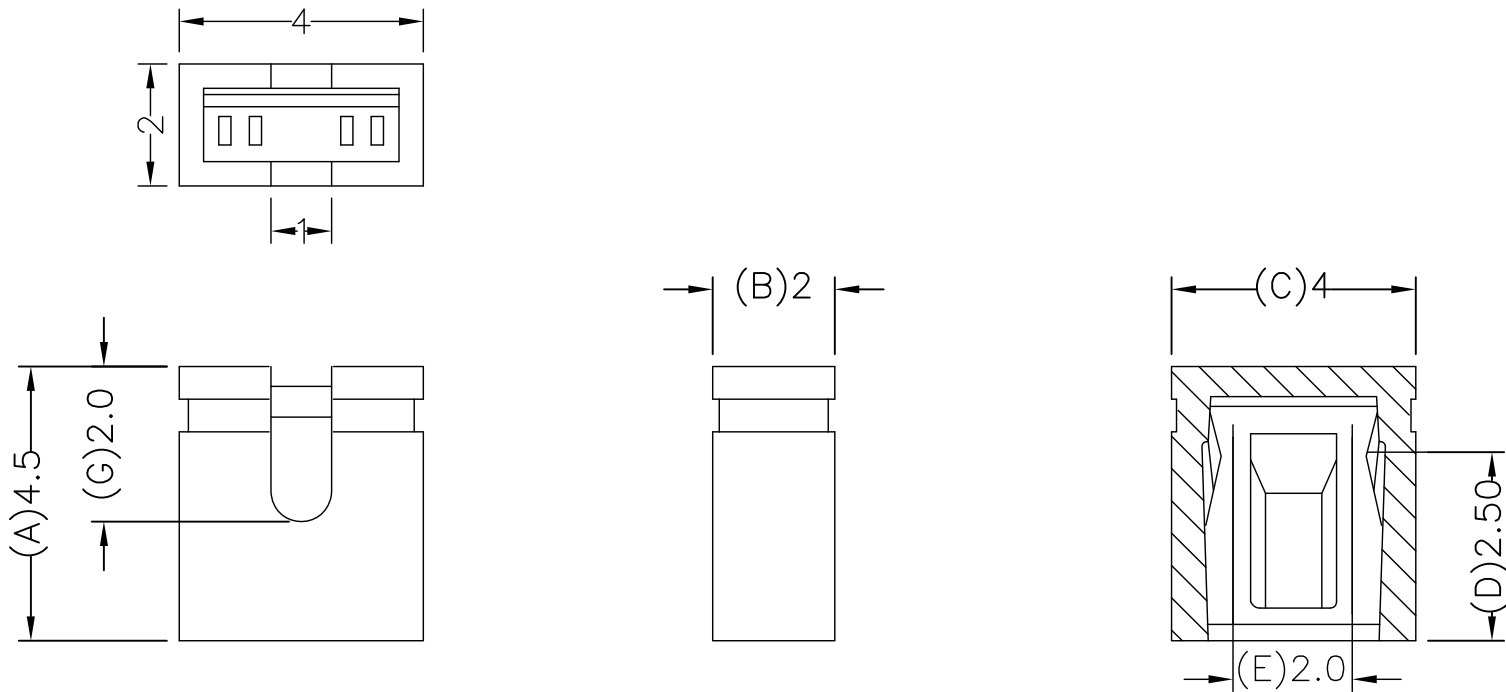

**FEATURES**

Double tuning fork type contact quarantees high reliability.  
 2.0MM pitch Low-Profile mini type Match to 0.50mm sq. posts.

**MATERIAL**

- . Insulator: 30% Glass Filled P.B.T.(UL 94v-0)
- . Contact: Gold Plated
- . Terminal: 5191 Phosphor Bronze.(0.20m/厚度)

**SPECIFICATIONS**

- . Current Rating: 1 amperes MAX
- . Conctact Resistance: 30mΩ MAX
- . Insuation Resistance: 1000 megohms MAX
- . Dielectric Withstanding Voltage: AC 650 volts RMS at sea leve

J07-0010-01
PART NUMBER

TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.15 3 PLC ± 0.1 4 PLC ± - ± 3° ANGLES ± - ± 3°	DWN ANDY_XIAO 23DEC2009	<b>HAOGUO XING YE SHARE CO.,LTD.</b>			
	CHK GAVIN_CHEN 23DEC2009				
	APVD JACKY YANG 23DEC2009	NAME	MINI JUMPER PITCH=2.00 OPEN TYPE		
	PRODUCT SPEC	SIZE	DRAWING NO	RESTRICTED TO	
MATERIAL SEE NOTE	APPLICATION SPEC	A3	J07-0010	-	
FINISH SEE NOTE	WEIGHT - GRAMS	CUSTOMER DRAWING			
PROJECTION 	DIMENSIONS: MM	SCALE	SHEET	REV	
		-	1 of 1	A	