

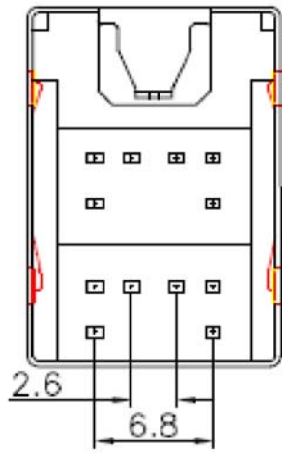
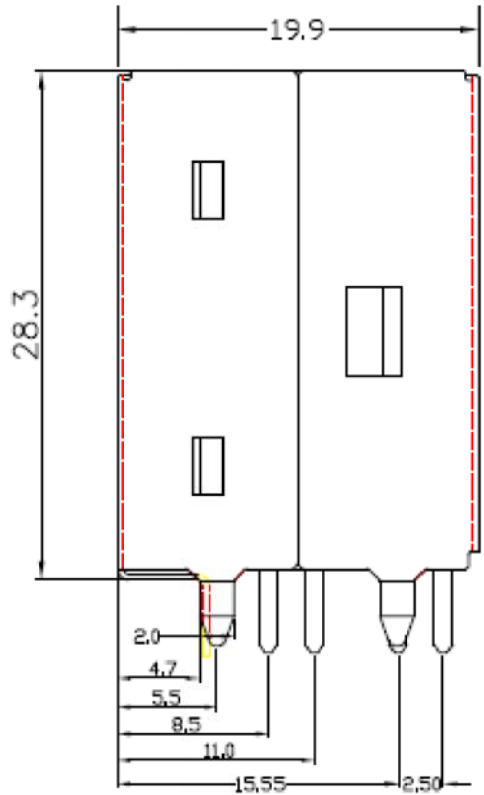


REV.	DESCRIPTION	DATE	DWN	APVD
1	PRELIMINARY	02NOV09	JC	BC

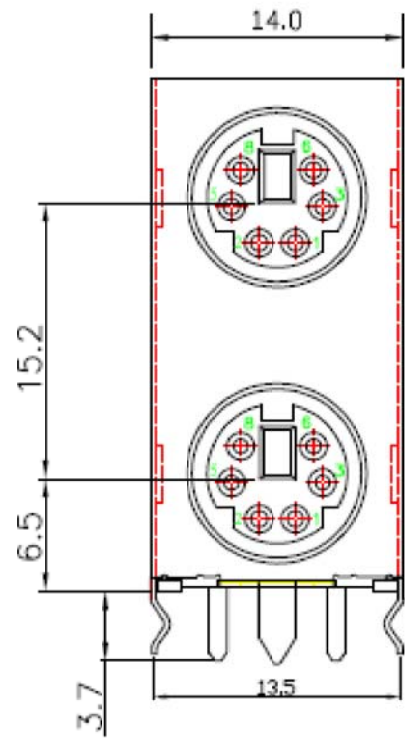

P.C.B LAYOUT
TOP VIEW

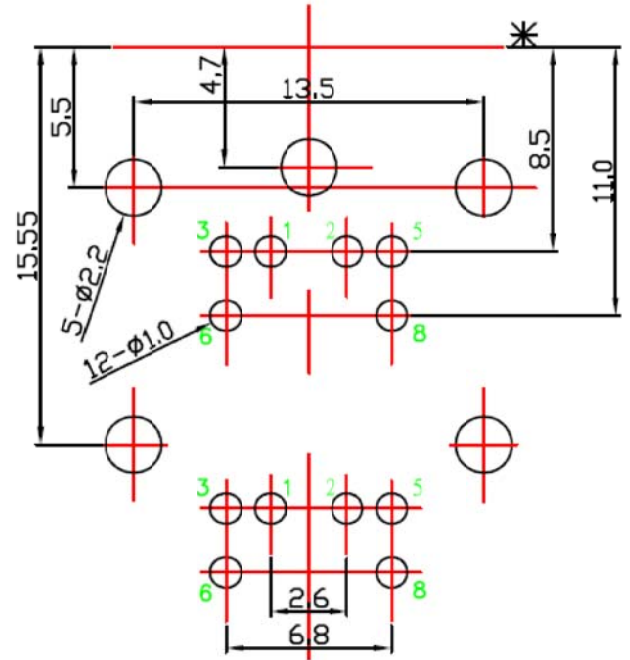

注意事項

1.材質:

- 1.1 膠芯: PBT (加纖30%)紫色`綠色
- 1.2 端子: 青銅.T=0.25 (鍍底50u",度錫100u",接觸區鍍金1u")
- 1.3 鐵殼: 鐵料.T=0.30(銅底80~100u",鍍銀100~120u")

2.電器性能:

- 2.1 耐壓: AC 100V/0.5mA/60s
- 2.2 絕緣: DC 500V/100MΩ(MIN)
- 2.3 溫度: -20°~85°

DIN-6P20-21

PART NUMBER

TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± 0.1 4 PLC ± - ANGLES ± 3°	DWN JOHN_CHANG 02NOV2009	HAOGUO XING YE SHARE CO.,LTD.		
	CHK MARKS_CHEN 02NOV2009			
MATERIAL SEE NOTE	APVD BEST_CHANG 02NOV2009	SIZE	DRAWING NO	RESTRICTED TO
FINISH SEE NOTE	PRODUCT SPEC	WEIGHT	A3 -	-
PROJECTION	APPLICATION SPEC	DIMENSIONS:	CUSTOMER DRAWING	SCALE
		MM		SHEET 1 OF 1
				REV 1