



REV.	DESCRIPTION	DATE	DMN	APD
A	RELEASED	31AUG09	AX	JY
A2		24JULY12	XL	WZ



NOTES:

1.MATERIAL:

HOUSING: PA66,FIRE RATING:(SEE TABLE)

COLOR:(SEE TABLE)

CONTACT: BRASS

2.FINISH:

CONTACT: GOLD PLATING OVER ALL

3.ELECTRICAL:

CONTACT RESISTANCE: 10m ohms Max

INSULATOR RESISTANCE: 1000M ohms Min



VOLTAGE RATING: AC 600V

CURRENT RATING: 9 Amp

DIELECTRIC WITHSTANDING VOLTAGE: AC 1500V (R.M.S)

4.ENVIRONMENTAL:

OPERATING TEMPERATURE: -40°C TO +105°C

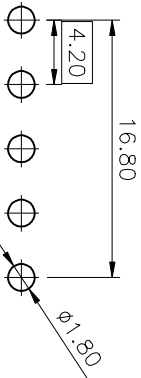

RECOMMENDED P.C.B. LAYOUT
TOLERANCES ±0.05

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DMN	24JULY2012
0 PLG	± -	CHK	XIAOXU LIU
1 PLG	± 0.3	APD	CITONG JIANG
2 PLG	± 0.2	APD	WEI ZHANG
3 PLG	± 0.15	PRODUCT SPEC	24JULY2012
4 PLG	± -	APPLICATION SPEC	JS-GC03140-A1
ANGLES	± 3°	FINISH	SEE NOTE
MATERIAL	SEE NOTE	PROJECTION	SEE NOTE
FINISH	SEE NOTE	WEIGHT	ATX_01-1(A)
PROJECTION	SEE NOTE	DIMENSIONS:	MM

UL94 V-2	1*5	TRANSPARENT	01-0013-02
UL94 V-0		BLACK	AB0312/05LB007S0
FIRE RATING	POST	COLOR	01-0013-01
		OLD PRAT NO.	PART NUMBER

Zhongxiang Electron Science Co.,LTD			
NAME			
ATX POWER CONNECTOR			
VERTICAL, DIP.			

SIZE	DRAWING NO	RESTRICTED TO
A3	C-01-0013	-
CUSTOMER DRAWING	SCALE	SHEET
	-	1 of 1
		REV A2