
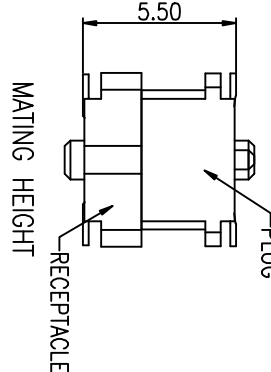
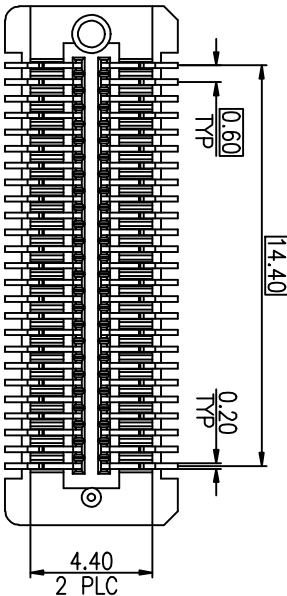
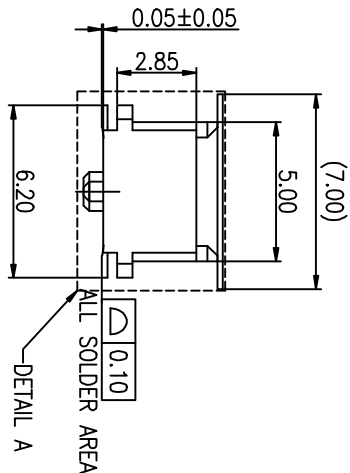
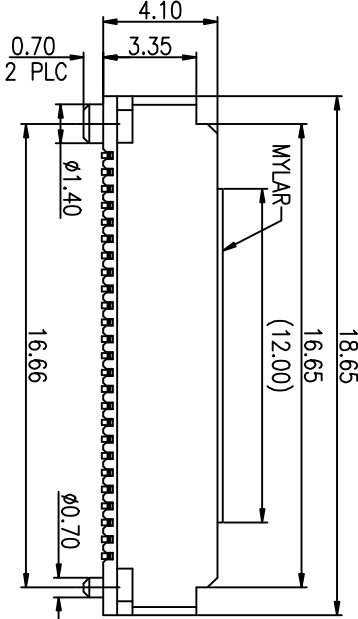


REV.	DESCRIPTION	DATE	DMN	APD
A	RELEASED	30JUL2010	YJ	DZ


- NOTE:
1. MATERIAL:
HOUSING: LCP UL 94V-0, COLOR: NATURAL.
CONTACTS: PHOSPHOR BRONZE
 2. FINISH:
CONTACTS: 0.254um[10u"] MIN. GOLD PLATING ON CONTACT AREA,
3.05um [120u"] MIN. MATTE-TIN PLATING ON SOLDER TAIL,
WITH ENTIRE CONTACT UNDERPLATED 1.27um [50u"] MIN. NICKEL.
 3. ELECTRICAL CHARACTERISTICS
3.1. CONTACT CURRENT RATING:0.5 AMPERE D.C MAX.,CONTINUOUS
3.2. LOW LEVEL CONTACT RESISTANCE:70 MILLIOHM MAX.(INITIAL)
90 MILLIOHM MAX. AFTER PHYSICAL AND ENVIRONMENTAL TESTI
3.3. DIELECTRIC WITHSTANDING VOLTAGE:500VAC FOR 1 MINUTE.
3.4. INSULATION RESISTANCE:100MEGOHMS MIN.
 4. ENVIRONMENT PERFORMANCE
OPERATING TEMPERATURE RANGE: -40° TO+85°

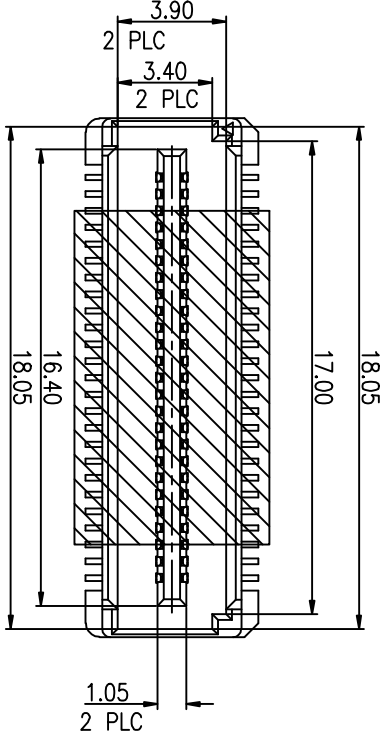

TOLERANCE:±0.05
RECOMMENDED PCB LAYOUT

13-0001-01
PART NUMBER

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DMN	30JUL2010
0 PLC	± -	CHK	CITONG JIANG
1 PLC	± 0.3	APD	GAVIN CHEN
2 PLC	± 0.2	APD	DAVID ZHONG
3 PLC	± 0.15	PRODUCT SPEC	
4 PLC	± -	APPLICATION SPEC	
ANGLES	± 3°		
MATERIAL	SEE NOTE		
FINISH	SEE NOTE		
PROJECTION	SEE NOTE		
WEIGHT			
DIMENSIONS:	MM		
NAME	Zhongxang Electron Science CO.,LTD		
SIZE	A3		
DRAWING NO	C-13-0001		
CUSTOMER DRAWING	SCALE -		
SHEET	1 of 2		
REV	A		
RESTRICTED TO			



DETAIL A