
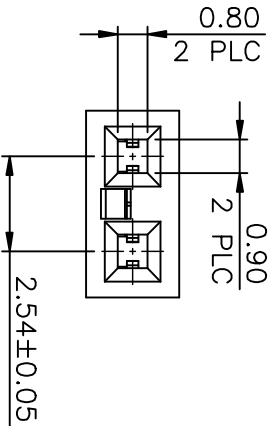


REV.	DESCRIPTION	DATE	DMN	APD
C		12Oct09	AX	JY
D		13Apr12	XX	WZ

NOTE:

1. MATERIAL: HOUSING: (SEE TABLE), UL 94V-2(PA66)/UL 94V-0(PBT), BLACK COLOR.
CONTACTS: PHOSPHOR BRONZE.
2. FINISH:
CONTACTS: (SEE TABLE) GOLD PLATED ON CONTACT ,
OVER 1.27μm [50μ"] MIN. NICKEL PLATED.
- 3.ELECTRICAL
VOLTAGE RATING: AC 500V (R.M.S.)
CURRENT RATING: 3 AMP
INSULATION RESISTANCE: 1000 MΩ MIN.
DIELECTRIC WITHSTANDING VOLTAGE: AC 1000V (R.M.S.)
CONTACT RESISTANCE: 20 mΩ MAX.
- 4.ENVIRONMENTAL
TEMPERATURE RANGE: -55°C TO +85°C

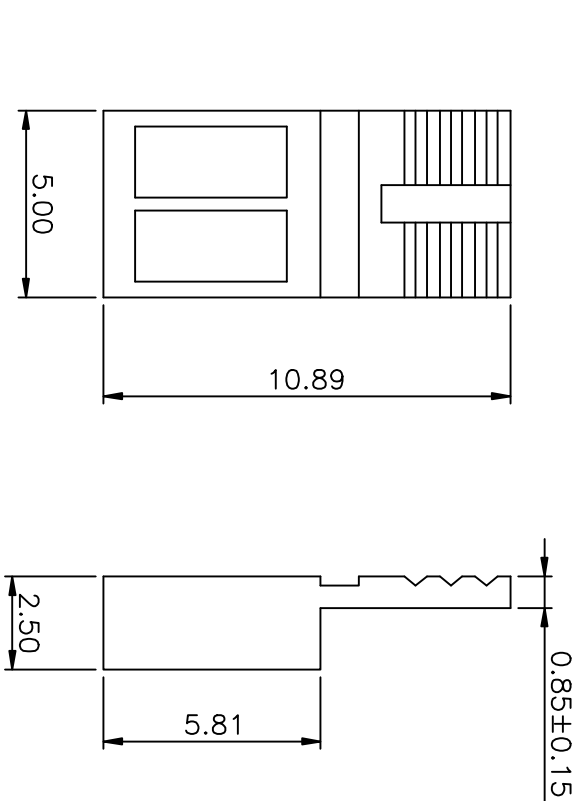

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DMN	13Apr2012	Zhongxiang Electron Science Co.,LTD	
0 PLC	± -	CHK	XIAOXU LIU		
1 PLC	± 0.3	APD	CITONG JIANG		
2 PLC	± 0.2	APD	WU ZHANG		
3 PLC	± 0.15	PRODUCT SPEC	JS-GC03136-A1		
4 PLC	± -	MATERIAL	SEE NOTE	JUMPER LONG HANDLE TYPE	
ANGLES	± 3°	APPLICATION SPEC	SEE NOTE		
FINISH	SEE NOTE	SIZE	DRAWING NO		
PROJECTION	SEE NOTE	WEIGHT	JUMPER-01-01		
DIMENSIONS:	MM	SCALE	0.124 9		
CUSTOMER DRAWING		SHEET	1 of 1	RESTRICTED TO	
		REV	D		