


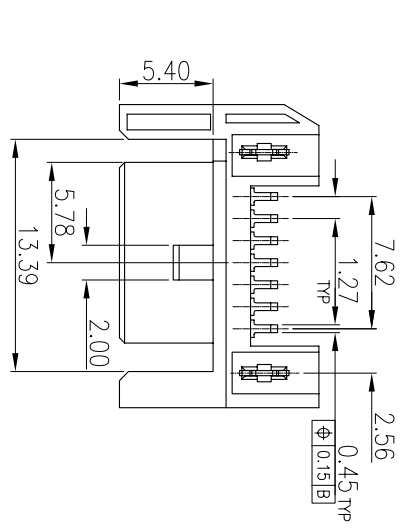






REV.	ECN. NO.	DR.	DATE
A	NEW	Chenlian	060306
B	ECN0603027	Chenlian	060325



SECTION B-B



SECTION C-C

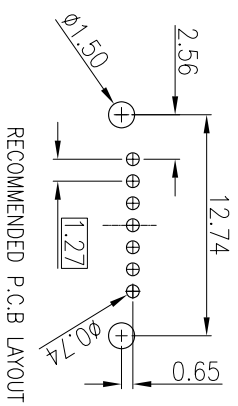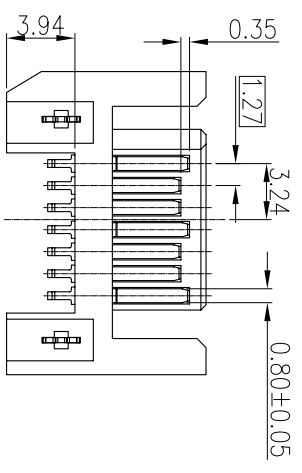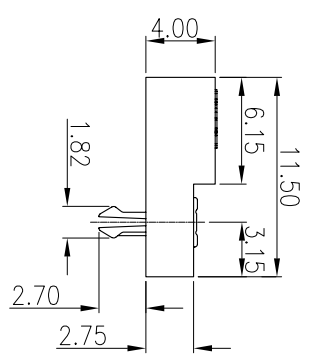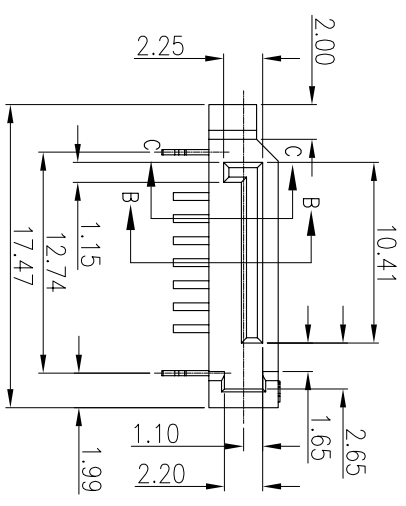

NOTE:
 1.MATERIAL
 HOUSING: HIGH TEMPERATURE THERMOPLASTIC UL94V-0
 CONTACT: COPPER ALLOY
 BOARDLOCK: COPPER ALLOY
 2.PLATING:
 CONTACT AREA: GOLD PLATED OVER NI
 SOLDER TAIL: 100U" MIN TIN PLATED OVER NI
 3.ELECTRICAL
 CONTACT RESISTANCE: 40 MILLIOHMS
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
 CURRENT RATING: 1.5A
 VOLTAGE RATING: 500V AC
 4.ENVIRONMENTAL
 OPERATING TEMPERATURE: -55°C TO +85°C

ORDER INFORMATION PART NUMBER :
 SA-XX F107122RA X X
 01-PBT COLOR PLATING
 02-NY6T B-BLACK C-半金锡
 03-NY66 W-WHITE O-半金锡15u"
 07-NY46 L-BLUE A-半金锡30u"
 09-LCP G-GREEN
 Y-YELLOW

Title: SATA 7P PITCH=1.27mm RIGHT		Zhongxiang Electron Science CO.,LTD	
ANGLE MALE DIP TYPE		中祥电子科技有限公司	
tolerances	angles	units	part no:
Linear		mm	SA-XXF107122RAXX
x ±0.30	x' ±5°	inch	
.xx ±0.20	x' ±2°	size	dwg no.
.xxx ±0.10	.xx' ±1"	A4	
projection	revision	scale	sheet
B		1:1	1/1
app.	chk.	date.	060306